


DATASHEET

Mains adapter IEC C20 to CEE7/3, IEC plug - protective contact socket

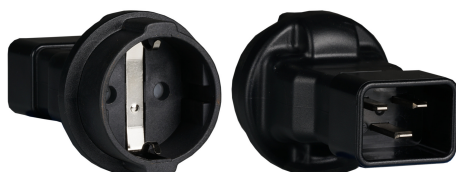

General data

The IEC C20 to CEE7/3 power adapter from EFB-Elektronik connects an IEC plug to a safety socket. The black version is designed for practical integration into technical environments.

- Connection of IEC plug to CEE7/3 coupling
- Black outer jacket colour for a discreet finish
- Three-pole design with protective conductor

The polyvinyl chloride (PVC) jacket supports a robust and at the same time functional design. With three wires and protective conductors, a technically clean adapter solution is created for applications in which a connection between IEC C20 and CEE7/3 is required.

Technical details

- Connector 1: IEC plug
- Connector 2: CEE7/3 coupling
- Core Count: 3
- Outer jacket colour: black
- Sheath material: Polyvinyl chloride (PVC)
- Protective conductor available
- Brand: EFB-Elektronik

Technical properties

Colour outer sheath	black
Connection 1	Cold device plug (IEC 60320)
Connection 2	Coupler with protective contact (CEE7/3)
Halogen free	No

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.



DATASHEET

Mains adapter IEC C20 to CEE7/3, IEC plug - protective contact socket

Material outer sheath	Polyvinylchlorid (PVC)
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Protective conductor	True
Spiralized cable	False
Type of packaging	Labeled polybag
With cord switch	False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath
EB515.5	Mains adapter IEC C20 to CEE7/3, IEC plug - protective contact socket	black

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

