

INLINE® USB 3.2 GEN.2 AOC CABLE, USB-C MALE/MALE




- Connectors: 2x USB Type-C male, SuperSpeed USB 10 Gb/s (USB 3.2 Gen 2)
- Active optical cable: fiber / copper hybrid cable
- Supports 2 lanes DisplayPort 1.4
- Supports Display Stream Compression 1.2 (DSC), DisplayPort Alt Mode
- Transmission of data, audio and video signals
- Maximum resolution (depending on the system and the connected hardware): DisplayPort 1.4 with DSC: up to 3840x2160 @144Hz, DisplayPort 1.4 without DSC: up to 3840x2160 @60Hz, DisplayPort 1.2 without DSC: up to 3840x2160 @30Hz
- Supports HDR10, HDR (High Dynamic Range), HDCP 1.4 and 2.2, 3D, EDID
- Fixed signal direction for video (Source / Display), Non-directional for data
- Data transfer rate up to SuperSpeed USB 10 Gb/s, downwards compatible to USB 2.0
- No external power supply required
- PD support: max 20V/3A (60W)

Art. Nr.	Length	EAN
35793A	3 m	4043718311224
35795A	5 m	4043718311231
35797A	7.50 m	4043718311248
35799A	10 m	4043718311255
35798A	15 m	4043718319022

Technical Data

Brand:	InLine®
Colour:	Black
Data transmission rate:	10 Gb/s
Height article:	0.80 cm
Manufacturer No.:	35793A
Outer diameter:	6.5 mm
Packing:	Retail
Shielding:	Double shielding
Side A:	USB-C male
Side B:	USB-C male
Signal:	Data/Power
Type:	USB 3.2 Gen.2
UL:	No
USB specification:	USB 3.2 Gen.2
Variant:	AOC cable
Width article:	1.50 cm

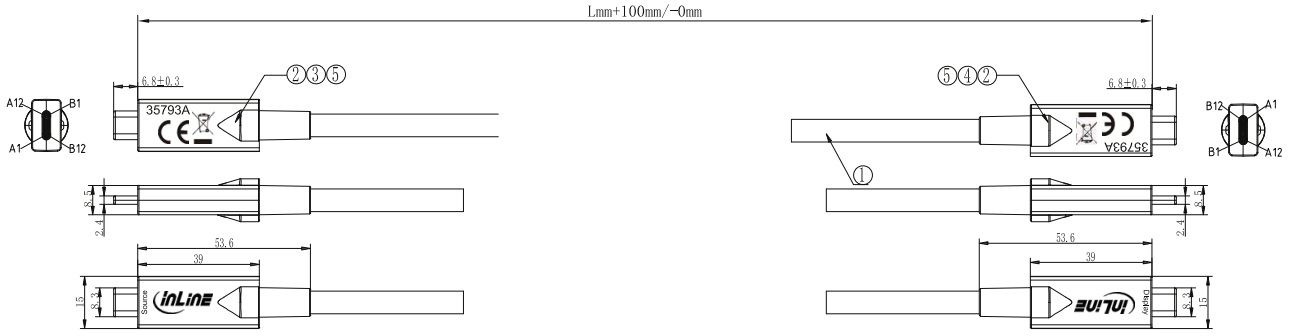

⑤	Housing	Zinc Alloy housing Black	2
④	PCBA 2	USB Type C PCBA (Device)	1
③	PCBA 1	USB Type C PCBA (Host)	1
②	TYPE C	USB3.2 C/M ,Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	2
①	Cable	(24AWG*1P+D+AL+HM)*1+28AWG*1P+21AWG*2C+28AWG*2C+2C+Optical Fiber+D+AL+B PVC Black OD 6.5±0.2mm	L±T
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y

Note:

- Maximum resolution (depending on the system and the connected hardware):
 DisplayPort 1.4 with DSC: up to 3840 x 2160 @ 144 Hz
 DisplayPort 1.4 without DSC: up to 3840 x 2160 @ 60 Hz
 DisplayPort 1.2 without DSC: up to 3840 x 2160 @ 30 Hz
- Support USB 3.2 Gen 2 10Gbps Data transmission ;
- Backwards USB 2.0 & USB 1.1 ;
- Support PD 60W (20V 3A) Power Delivery
- Packing:lpc/box+Inline label

