



INLINE® MINI DISPLAYPORT TO DISPLAYPORT CABLE


black

Cable for connecting monitors with DisplayPort connector on the Mac-book etc. with Mini Displayport output or monitos with mini DisplayPort to computer with DisplayPort output.

- Mini DisplayPort connector to DisplayPort connector
- Max resolution is 3840x2160/60Hz, 2560x1600, 1080p (FullHD) is supported
- Color: Black
- Gold plated contacts
- in a recloseable PE bag with EAN code

Item No.	Length	EAN
17137S	0.30 m	4043718275281
17136S	0.50 m	4043718266517
17131S	1 m	4043718266487
17134S	1.50 m	4043718266500
17132S	2 m	4043718266494
17133S	3 m	4043718280216
17135S	5 m	4043718280223

Technical Data	
Article height:	1.5 cm
Article width:	2.0 cm
Colour:	Black
Data transmission rate:	21.6 Gb/s
Design:	Round cable
Diameter:	AWG 32
DisplayPort specification:	DisplayPort 1.2
Gold plated contacts:	Yes
Maximum display resolution:	3840x2160@60Hz
Operation temperature:	-10 - 60 °C
Outer diameter:	5.0 mm
Shielding:	Triple shielding
Side A:	DisplayPort plug
Side B:	Mini DisplayPort plug
Signal:	Video
Storage temperature:	-20 - 70 °C
Type of packaging:	InLine® Bag
UL:	Yes
UL E-number:	E344313

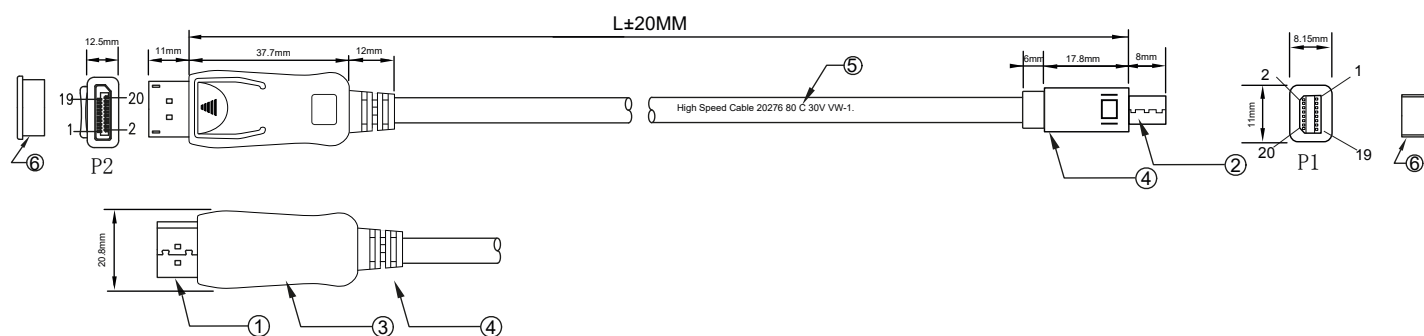

⑥	DUST COVER	PE, COLOR: TRANSPARENT	2
⑤	CABLE	(1/0.18B*1P+1C*+AM)*5C+1/0.20BC*4C+AM+D+64/0.12ALMG+PVC OD: 5.0±0.1MM , COLOR: BLACK	L
④	OUTER MOLD	BLACK PVC	1
③	OUTER MOLD	BLACK ABS	1
②	CONNECTOR	miniDP MALE,GOLD PLATED PIN ,GOLD PLATED SHELL	1
①	CONNECTOR	DP MALE ,GOLD PLATED PIN,GOLD PLATED SHELL	1

NOTE:

1.Electrical properties:


1.1 Tested by quantum data 980 handheld test
Instrument for DP1.2(21.6G)

1.2 Tested by PC,3840*2160 60Hz 4:4:4

Tested by PC,3840*2160 30Hz 4:4:4

Tested by PC,720P,1080P

2. ROHS 2.0 and REACH

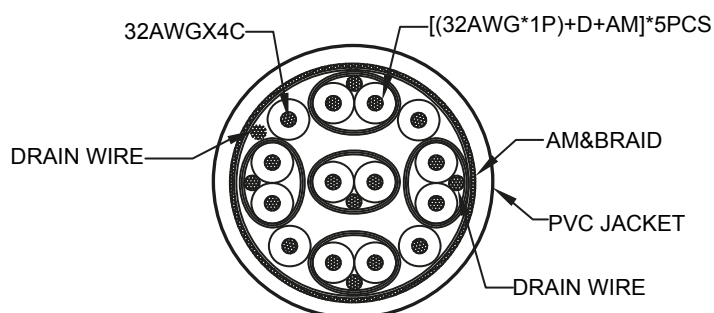


PRINTING: High Speed Cable 20276 80 C 30V VW-1.

PIN OUT

P1miniDP P2 DP

1	11
3	12
5	10
7	8
9	9
11	7
13	5
15	6
17	4
19	19
2	18
4	13
6	14
8	2
10	3
12	1
14	16
16	15
18	17
20	20
(no connection)	
SHELL	SHELL

Item No.	Length	EAN
17137S	0.30 m	4043718275281
17136S	0.50 m	4043718266517
17131S	1 m	4043718266487
17134S	1.50 m	4043718266500
17132S	2 m	4043718266494

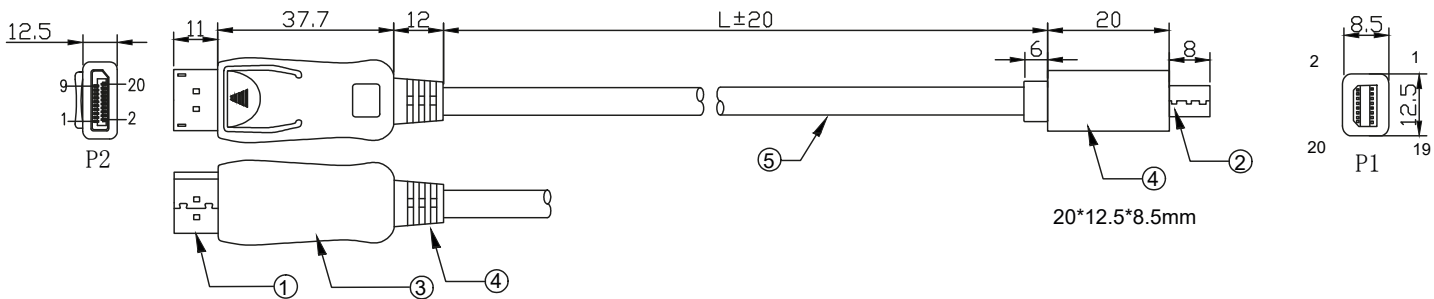



⑤	CABLE	(1/0.25BC*1P+1/0.25BC+AM)*5PCS+1/0.25BC*4C+AM+1/0.25BC+64/0.12AL +PVC OD:6.0+0.1mm ,COLOR:BLACK	L
④	OUTER MOLD	BLACK PVC	1
③	OUTER MOLD	BLACK ABS	1
②	CONNECTOR	MINIDISPLAYPORT MALE, GOLD PLATED PIN,GOLD PLATED SHELL	1
①	CONNECTOR	DISPLAYPORT MALE, GOLD PLATED PIN,GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

NOTE:

1.Electrical properties:

- 1.1 Tested by quantum data 980 handheld test Instrument for DP1.2(21.6G)
- 1.2 Tested by PC,3840*2160 60Hz 4:4:4
Tested by PC,3840*2160 30Hz 4:4:4
Tested by PC,720P,1080P

2.ROHS 2.0 and REACH

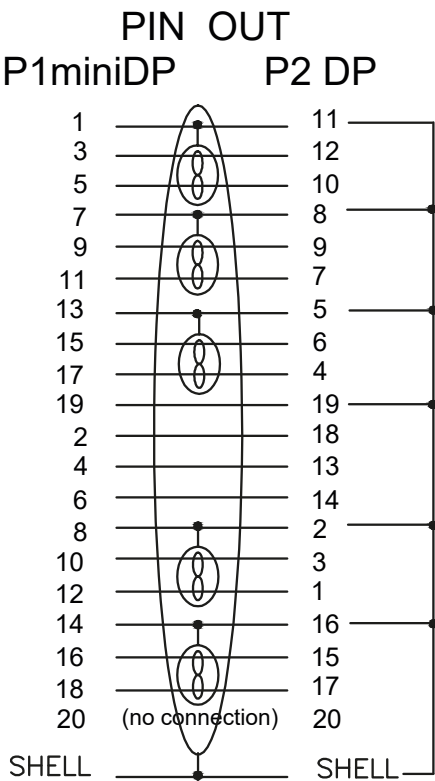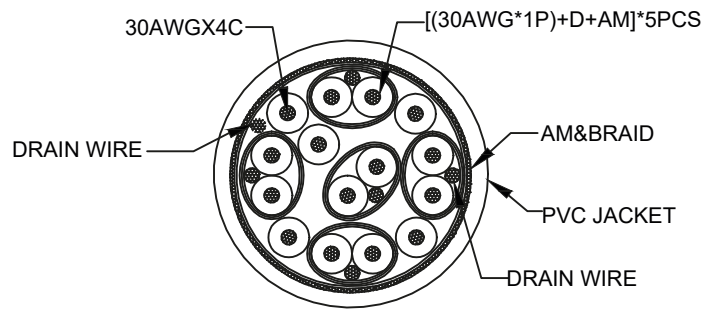

Item No.	Length	EAN
17133S	3 m	4043718280216
17135S	5 m	4043718280223

If you have any further questions, please contact marketing@inline-info.com www.inline-info.com/en/