


# DIGITUS® Active Mini DisplayPort to HDMI Adapter / Converter

AK-340416-002-W

EAN 4016032427490

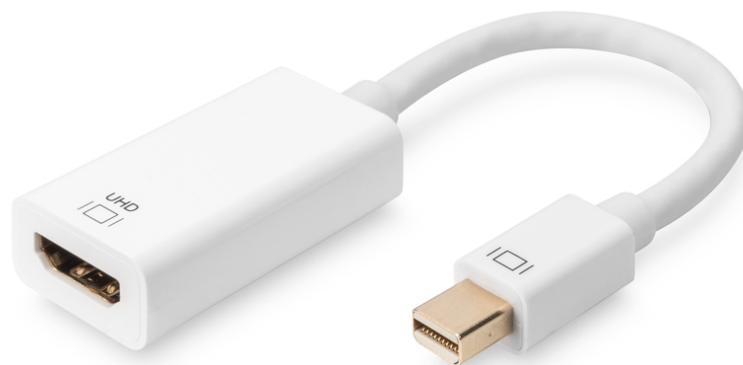

## DisplayPort Adapter Cable, Type mini-DP - HDMI A M/F, 0.2m, HDMI 2.0, active, gold, wh

The 4K Mini DisplayPort to HDMI Adapter / Converter (Mini DisplayPort male to HDMI female) enables to reflect your contents from your computer or notebooks to your TV. It supports a resolution up to 4096 x 2160. So you can show your pictures, videos, documents, presentations, etc. in Ultra HD and use it optimal in meetings or in private areas.

### HDMI 2.0 feature support

- Integrates a complete DisplayPort receiver and complete HDMI transmitter for video format conversation
- Integrated HDMI2.0 transmitter, up to supporting 4K x 2K@60Hz, 4K x 2K@30Hz and 1080P / 3D videos.
- Support DP++ Dual-Mode
- Supports DisplayPort 1.2 and 4 lanes at 1.62Gbps, 2.7Gbps and 5.4Gbps
- Full HDCP 1.4 / 2.2 content protection support.
- Deep Color 24bit

- Audio input formats: 8-ch LPCM, compressed audio (AC-3, DTS) and HBR audio format up to 24-bit audio sample size and 192 khz frame rate.


### Attributes

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

## Logistics

|                                 | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³       |
|---------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
| Packaging Unit Carton           | 200             | 6.70           | 38.10         | 30.20         | 24.10          | 27,729.90 |
| Packaging Unit Inside           | 10              | 0.34           | 33.00         | 27.90         | 7.60           | 6,997.32  |
| Packaging Unit Single           | 1               | 0.03           | 20.00         | 15.00         | 1.52           | 456.00    |
| Net single without<br>Packaging | 1               | 0.03           | 23.20         | 3.50          | 1.40           | 0.00      |

## More images:

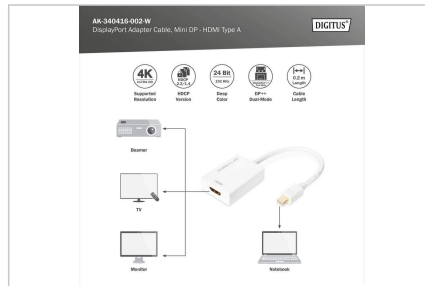

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)