


ROLINE S/FTP Patch Cord Cat.6A / Class EA, LSOH, Slim, PoE, blue, 3 m

Product No. 21.15.4343
Manufacturer ROLINE
Manufacturer No. 21.15.4343
EAN (single piece) 7630049638242

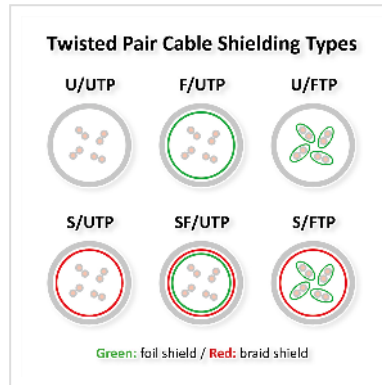

S/FTP (PiMF) Cat. 6A LSOH Patch Cord with shielded RJ-45 connectors on both sides. PoE-capable although it is slim, flexible and tangle-free.

- S/FTP (PiMF) LSOH Cat. 6A Patch Cord
- For use in 10-Gigabit Ethernet networks, especially for connecting devices (e.g. IP cameras)
- Slim, flexible and tangle-free
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- Durable due to moulded kink protection
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)

Colour	blue
Length	3 m
Scope of delivery	Patch Cord
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 28
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Slim cable	yes
Bend radius	Min. 27 mm
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	blue
External cable diameter	4.5 +/-0.2mm
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C

Storage temperature max.	75 °C
Weight	67 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	200 mm
Depth of packaging (single piece)	200 mm
Package weight (single piece)	0.072 kg