

## INLINE® 19" SOCKET STRIP, 6-WAY, SURGE AND OVERLOAD PROTECTION, SWITCH



Power strip with 6 sockets for installation in the 19" network cabinet

- 6-way power strip with switch and overload protection, max 3680 W as well as with surge protection
- Sockets according to DIN 49440, rotated by 45°
- Maximum total load 3680 W
- Cable: H05VV-F3G1.5mm<sup>2</sup>, length 2m, with angled earth contact plug CEE7/7
- Size of strip: Width 19" (482.6mm), Height: 1U (45mm), Depth 45mm
- Aluminium strip
- Colour: black RAL9004

### Technical Data:

- Alignment of connections: 45°
- Cable: 3G1.5 mm<sup>2</sup>
- GS tested: No
- Input C14: No
- Input voltage: 230 V
- Material: plastic, aluminium
- Max. output power: 3680 W
- Number of protected outlets (CEE 7/3): 6
- Output current: 16 A
- Plug: Earthing contact angled
- Supply line: Mains cable with earthing contact plug
- Touch protection: Yes
- Type: 19"
- With overvoltage protection: Yes



Sockets:  
6×DIN 49440 45° degree Compliant VDE0620-1  
16A/4000W, AC250V, IP20  
CE certified

Cable:  
2,0m H05VV-F 3G 1,5mm<sup>2</sup> with German  
type earth contact plug CEE7/7  
Cable:VDE certified  
Plug: VDE certified

Profile:  
IHE, Aluminum alloy Black(RAL9004)

Plastic material:  
Fireproof Polypropylene  
Color:black RAL9004

Holding flanges :  
SPCC Thickness 2.0mm \* 2


Switch:  
2-poles, illuminated , red  
VDE certified

Overload protection:  
16A 125/250V/AC 50/60Hz

Surge protection:  
Green LED

Certificate for the Whole PDU:  
Have CE certificate

Packing: 1pcs/PE bag + Inner carton

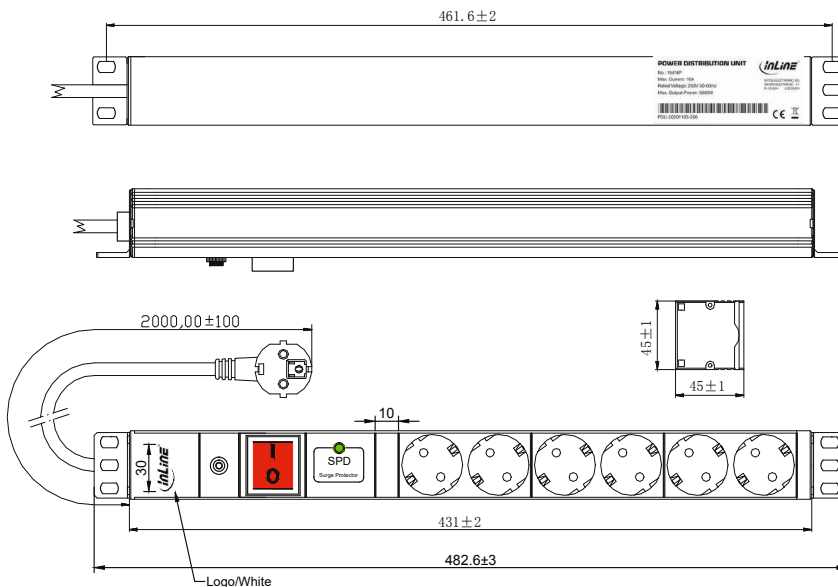

### NOTE :

- 1: TESTING: 100% OPEN SHORT
2. ROHS 2.0 & REACH COMPLIANT

**EAN: 4043718298259**  
**ART.-NR.: 16416P**