

# 4-Port USB VGA/Audio Cable KVM Switch (1.8 m) / (0.9 m, 1.2 m) CS64U / CS64US


The CS64U / CS64US takes a giant step forward from prior cable KVM models, by offering built-in cables, USB peripheral sharing, and a firmware upgrade function that allows you to keep up with latest available versions.

Furthermore, the CS64U / CS64US features enhanced Video DynaSync™ technology, which stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution. The CS64U / CS64US also offers multiplatform support and computer selection via hotkeys to provide the ultimate in desktop convenience.



## Features

- One USB console controls four USB computers
  - USB mouse port can be used for USB 1.1 hub and USB 1.1 peripheral sharing
  - Computer selection via hotkeys
  - Select OS via Hotkey
  - Audio-enabled
  - Multiplatform support – Windows, Linux, Mac and Sun
  - Compact design – built-in 1.8 m cables (CS64U), or 0.9/1.2 m cables (CS64US)
  - Superior video quality – up to 2048 x 1536 @ 60 Hz; DDC2B
  - Video DynaSync™ – Exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports
  - Supports multimedia keyboards
  - Supports wireless keyboards and mice
  - Supports multifunction mice
  - Sun / Mac keyboard support and emulation\*
  - Auto Scan function to monitor computer operation
  - Bus-Powered
  - Firmware upgradable
- \* 1. PC keyboard combinations emulate Sun / Mac keyboards  
2. Sun / Mac keyboards only work with their own computers

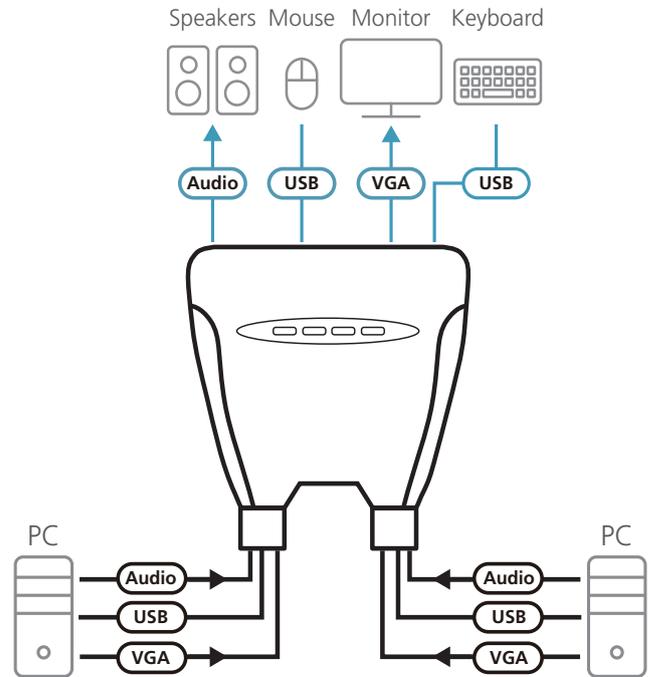

## Specifications

	CS64U	CS64US
<b>Computer Connections</b>	4	
<b>Port Selection</b>	Hotkey	
<b>Connectors</b>		
Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type-A Female 1 x 3.5mm Audio Jack Female (Green)	
KVM Ports	4 x HDB-15 Male (Blue) 4 x USB Type-A Male 4 x 3.5mm Audio Jack Male (Green)	
<b>LEDs</b>		
Selected	4 (Green)	
<b>Cable Length</b>		
Computer	4 x 1.8 m	2 x 0.9 m; 2 x 1.2 m
<b>Emulation</b>		
Keyboard / Mouse	USB	
<b>Video</b>	2048 x 1536 @ 60 Hz; DDC2B	
<b>Scan Interval</b>	1-99 seconds	
<b>Power Consumption</b>	DC 5 V : 0.9 W	
<b>Environmental</b>		
Operating Temperature	0 – 50 °C	
Storage Temperature	-20 – 60 °C	
Humidity	0 – 80% RH, Non-condensing	
<b>Physical Properties</b>		
Housing	Plastic	
Weight	0.73 kg	0.58 kg
Dimensions (L x W x H)	9.41 x 9.72 x 2.60 cm	

## ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 05/2022 V3.0

© Copyright 2022 ATEN® International Co. Ltd.  
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.

