



item No.	length	Inner carton packing quantity
11.99.4352	2m±20mm	20pcs
11.99.4353	3m±20mm	50pcs
11.99.4355	5m±30mm	30pcs
11.99.4359	10m±100mm	20pcs

SPECIFICATION

WIRING DIAGRAM

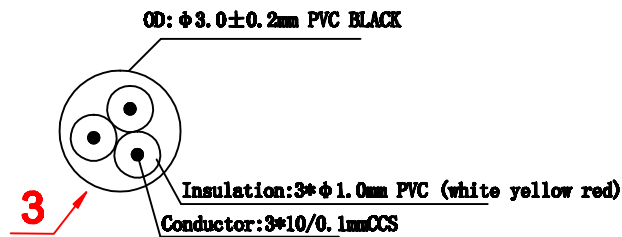

3.5 STEREO MALE

3.5 STEREO FEMALE

4	MOULDED1	PVC 45P black	2*10g
3	CABLE	3C AUDIO CABLE Black	L
2	CONNECTORS2	3.5stereo Female Nickel Plated	1PCS
1	CONNECTORS1	3.5stereo Male Nickel Plated	1PCS
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY

1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. INSULATION RESISTANCE: 100Meg Ohm.
3. WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
4. OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
5. 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED _____ DATE: _____
 SAMPLE APPROVED PER _____ DATE: _____
 DRAWING SPECIFICATIONS

	NAME	VALUE 3.5mm Extension Cable, M - F, black	SECOMP
SCALE	NONE		
SHEET	1/1	ITEM NO. 11.99.4352/11.99.4353/11.99.4355 /11.99.4359	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		CUS. P/N 3.5mm STEREO M TO 3.5mm STEREO F	
.X ±	.XX ±	DRAWING NO. MW-SIN -007	ENG. DATE
.XXX ±	ANGLES ±		CHECKED DATE
REV. 00	CUS. REV		APPROVED DATE

01	NEW ISSUE	2018.03.22
REV.	MODIFY DESCRIPTION	DATE