

16 Channel

Network Video Recorder

MODEL: VIGI NVR2016H







2 SATA Interfaces Up to 16 TB for Each HDD



Remote Management
Dedicated VIGI app



Smart Detection

Configuration for Better Monitoring[‡]



Two-Way Audio

Listen and Talk in Real Time



Quick Playback

Support for 16-Channel Synchronous

Playback



Onvif

Promises Comprehensive Compatibility



Overview

VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever. Our outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

Highlight



16-Channel Live View

Ensure a real-time display of every monitored area on one screen and take everything under your control.



Streamlined Setup

Simply connect your VIGI NVR and VIGI cameras to a switch, and plug in a monitor, then you're ready to go.



4K Video Output

Show more details with up to 8MP resolution for one channel and 16MP decoding capacity in total for all channels



Easy Management

Seamlessly manage the NVR and connected cameras via the web UI, NVR UI, VIGI app, and VIGI Security Manager. Customize the management systems to suit your specific needs.



Practical Playback

Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.




Mass Storage

2 SATA interfaces (up to 16 TB per each HDD) ensure to store and secure your data for quick, convenient access.



Network Topology

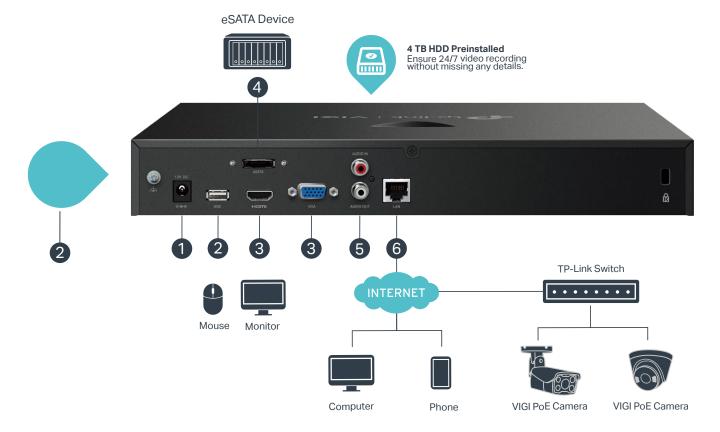

- 1. Power Supply
- 2. Two USB Ports for Mouse, Keyboard, or Mobile Hard Disk Connection^a
- 3. HDMI and VGA Ports for Video Output
- 4. eSATA interface for eSATA device
- 5. AUDIO IN and AUDIO OUT for Two-Way Audio
- 6. LAN Port for Ethernet Connection

^A A hard disk drive (not included) must be installed for operation.



[†]HDD is not included.

[‡]Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.


Specifications

NVR	
Product Model	VIGI NVR2016H
Video and Audio	
IP Video Input	16-Channel [†]
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	60 Mbps
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
Video Output Mode	HDMI/VGA Simultaneous Output
Multi-View Display	1/4/6/8/9/16
Decoding	
Audio Compression	G.711A/G.711U/G.726
Video Compression	H.265+/H.265/ H.264+/H.264
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Synchronous Playback	16-Channel
Capability	25fps: 2-ch @ 8MP, 4-ch @ 4MP, 8-ch @ 2MP 30fps: 4-ch @ 3MP, 2-ch @ 5MP
Record Management	
Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording
Playback Mode	Instant Playback, Rgular Playback, Tag Playback, Event Playback
Backup Mode	Regular Backup, Video Clip Backup
Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/Off
Network	
Protocols	UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP
Interoperability	ONVIF Profile S, CGI
Mobile Phone Access	Android, iOS

Browser	Chrome (57+), Firefox (52+), Edge (91+)
External Interface	
Network Interface	1, RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
USB Interface	1 Front USB 2.0 Port, 1 Rear USB 2.0 Port
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	N/A
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	1
HDMI	1
VGA	1
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 16 TB Capacity for Each HDD*
Alarm	
General Alarm	 Motion Detection Video Tampering Scene Change Detection Line-Crossing Detection Intrusion Detection Region Entering Detection Region Exiting Detection Loitering Detection Object Abandoned/Removal Detection Vehicle Detection Human Detection Abnormal Sound Detection Smart Frame Note: The alarm function requires the use of a camera.
Anomaly Alarm	 Video Loss Offline and IP Conflict Disk Exception Login Exception Fan Exception Note: The alarm function requires the use of a camera.
Alarm Linkage General	 Recording White Light Alarm Buzzer Log Audible Alarm Note: The alarm function requires the use of a camera.

Package Contents	 VIGI Network Video Recorder Power Adapter HDD Screws Mouse Quick Installation Guide
Power Supply	DC 12V/3.3A
Max Power Consumption (Without Disk)	4.778 W
Max Power Consumption (With Disk)	24.16W
Working Tomporature	• NVR: -10–55 °C
Working Temperature	Power Adapter: 0–40 °C
Storage Temperature	-40-70 °C
Working Humidity	10%~90% RH Non-Condensing
Storage Humidity	10%~90% RH Non-Condensing
Product Dimensions (W × D × H)	330 × 285 × 45 mm
Net Weight	1.9 Kg [§]
Gross Weight	3.2 Kg [§]
Certification	CE, EAC, UKCA, RCM, Triman, BSMI, VCCI, FCC, IC, HDMI

Dimensions

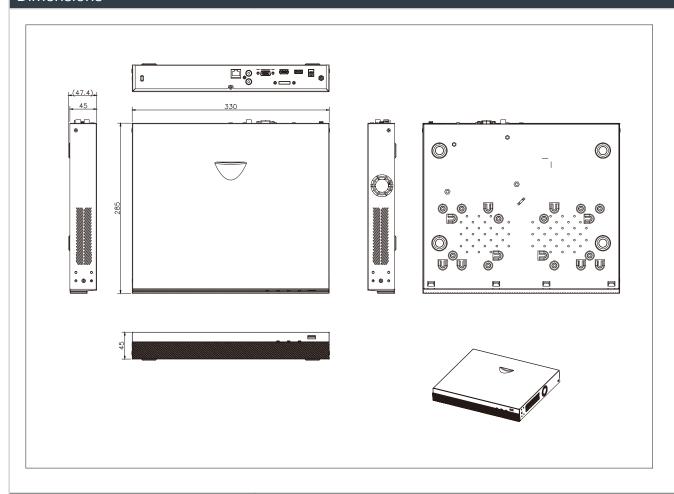

Build Features



†The number of simultaneously playable channels may be fewer than 16, or none, if the total resolution exceeds 16MP.

*HDD is not included.

‡This model currently supports ONVIF Profile S.

§Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.